

PRODUCT SPECIFICATION

White Extra Permanent

Description

- White, high bulk, woodfree, filled, uncoated 65gsm.
- Excellent whiteness, opacity and smoothness for its paper type.
- High adhesion to cardboard, low energy and curved surfaces.
- Minimum application temperature: -25°C
- Temperature range: -50°C to +70°C
- Chill grade - ideal for chilled food labelling.

Very good heat resistance which enables trouble free performance in different hot fusing print processes. High adhesion to cardboard and low energy (e.g. plastic bags) surfaces. Excellent for use where increased tack levels are required particularly on tightly curved surfaces and packaging containing a high degree of recycled fibre e.g. corrugated boxes.

The adhesive conforms to the EN71-3 (Toy Safety) & Packaging (Essential Requirements) Regulations. No heavy metals are used in the manufacturing process and typical contents are less than 1 ppm.

Laminate Information


Thickness: 165 mic

Weight: 160 gsm

Backing

White high density kraft paper with excellent lay flat properties

Printing Compatability

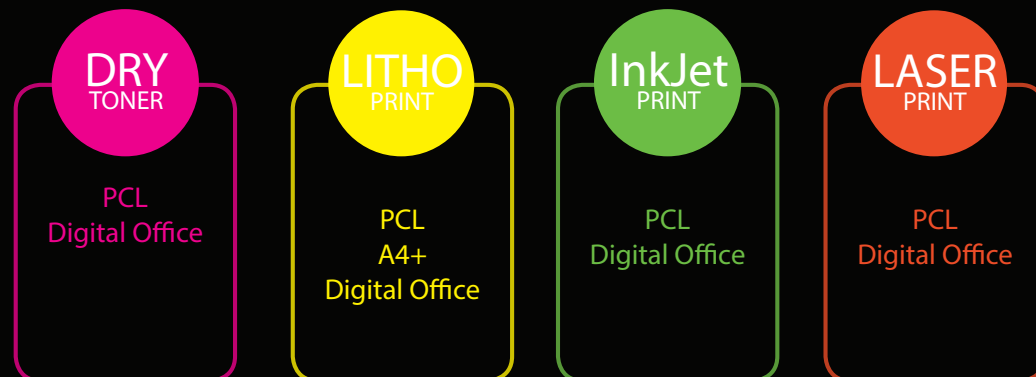

For detailed printing information please refer to our 'Printing Guidelines'

PCL
by
AVERY